


**KASKO RECEIVERS OW3****R C K3****Technical features**

Model	Capacity		Axis		Pipes diameter				Discharge type	Filter type	Flange holes		
	dmc	cft	Ø mm	Ø in	Ø mm (std)	Ø in (std)	Ø mm (opt)	Ø in (opt)			N°	Ø mm	Ø in
R1C32K3	1	0,04	180	7,1	30	1,2	40	1,6	Gravity	Net - type 2	8	0,04	0,002
R3C42K3	3	0,11	230	9,1	40	1,6	50	2,0	Gravity	Net - type 2	8	0,11	0,004
R6C42K3	6	0,21	280	11,0	40	1,6	50	2,0	Gravity	Net - type 2	8	0,21	0,008
R12C42K3	12	0,42	280	11,0	40	1,6	50	2,0	Gravity	Net - type 2	8	0,42	0,016
R24C52K3	24	0,85	280	11,0	50	2,0	60	2,4	Gravity	Net - type 2	8	0,85	0,033
R48C52K3	48	1,70	280	11,0	50	2,0	60	2,4	Gravity	Net - type 2	8	1,70	0,067



KASKO RECEIVERS OW3

R C K3

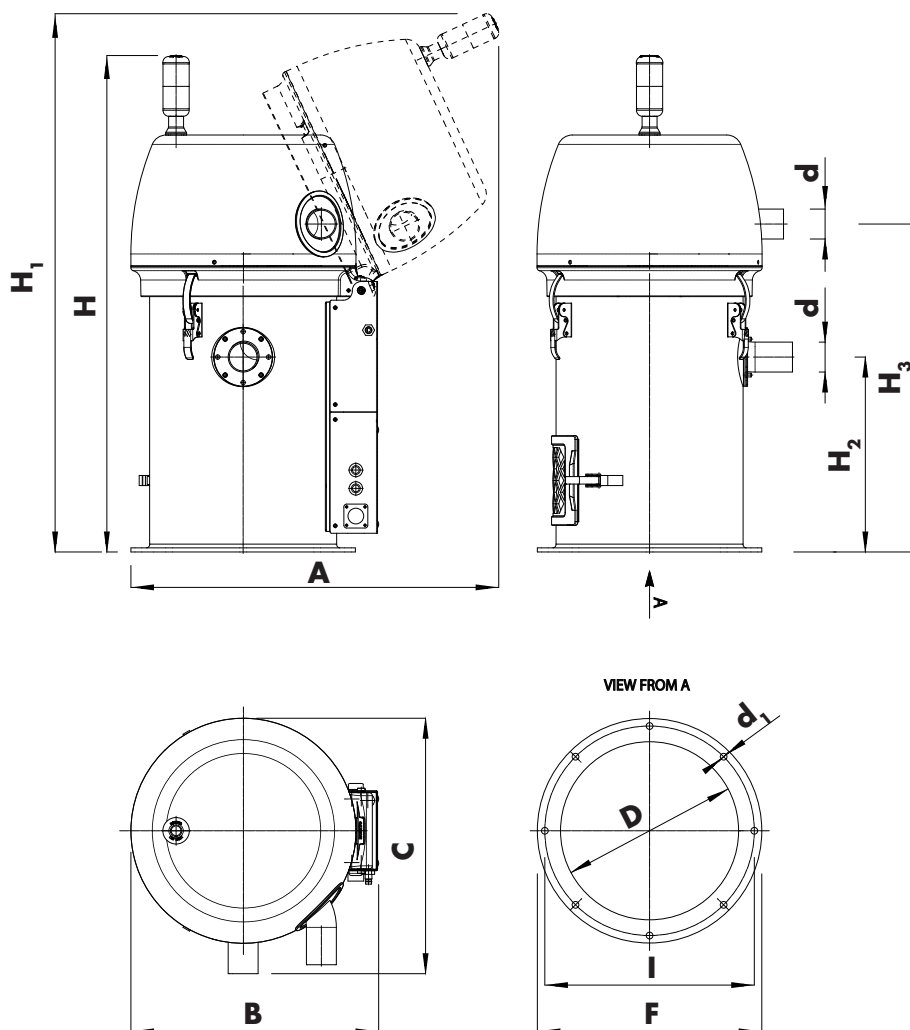

Dimensions

Model	A		B		C		D		H		H ₁		H ₂		H ₃		d		I		F		d ₁		Weight	
	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	in	kg	lb
R1C32K3	425	16,7	226	8,9	236	9,3	140	5,5	528	20,8	565	22,2	174	6,9	340	13,4	30	1,2	180	7,1	195	7,7	7	0,3	8,0	18,0
R3C42K3	461	18,1	288	11,3	300	11,8	196	7,7	623	24,5	639	25,2	220	8,7	398	15,7	40	1,6	230	9,1	249	9,8	9	0,4	10,5	23,0
R6C42K3	492	19,4	331	13,0	341	13,4	238	9,4	664	26,1	719	28,3	261	10,3	438	17,2	40	1,6	280	11,0	300	11,8	9	0,4	12,5	28,0
R12C42K3	492	19,4	331	13,0	361	14,2	238	9,4	804	31,7	859	33,8	401	15,8	578	22,8	40	1,6	280	11,0	300	11,8	9	0,4	14,2	31,0
R24C52K3	627	24,3	436	17,2	459	18,1	238	9,4	838	33,0	941	37,0	339	13,3	545	21,5	50	2,0	280	11,0	300	11,8	9	0,4	16,5	36,0
R48C52K3	627	24,3	436	17,2	471	18,5	238	9,4	1088	42,8	1191	46,9	589	23,2	795	31,3	50	2,0	280	11,0	300	11,8	9	0,4	20,0	44,0