

REF: **EFD**


EJECTEUR CYLINDRIQUE

TREMPE / NITRURE / RODE

Normes DIN 1530 / ISO 6751

Ejecteurs trempés, rectifiés
et niturés, rodé.
Tête refoulée à chaud.

Matière: 1.2344 (Z 40 CDV 05)
Dureté de tête: 45 ± 5 HRc
Dureté de corps: 53 ± 2 HRc
Dureté surface: 1100 à 1200 Hv₃₀

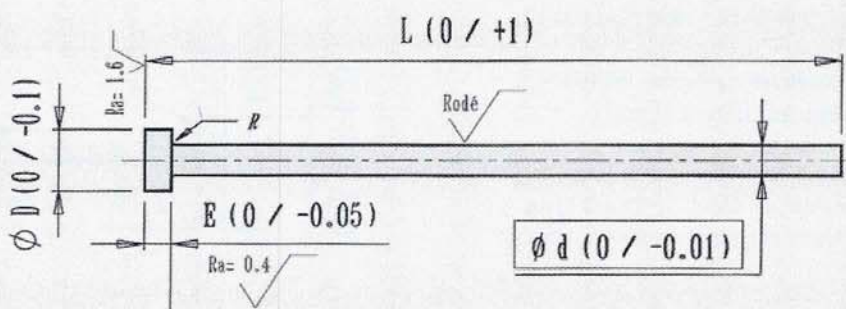

D	E	d d	Longueur Total L						
			100	160	200	250	315	400	500
3	1.5	1.5	4.94	5.27	6.76	8.40			
4	2	2	3.96	4.61	5.93	7.58			
4	2.2	2.2	4.78	5.27	6.59	9.06			
5	2	2.5	4.28	4.78	6.10	7.58			
6	2.7	2.7	4.78	5.27	6.59	7.91			
6	2.8	2.8	4.78	5.27	6.59	7.91			
6	3	3	3.63	4.12	4.94	5.93	7.25		
6	3.2	3.2	3.96	4.61	5.27	6.10	7.58		
6	3	3.5	3.96	4.61	5.27	6.10	7.58		
8	3	3.7	3.96	4.61	5.27	6.10	7.58		
8	3	4	3.46	3.96	4.78	5.77	7.25	11.04	
8	3	4.2	3.63	4.12	4.94	5.93	7.42	11.04	
8	3	4.5	4.12	4.94	5.93	7.42	9.23	12.86	
10	3	5	3.30	3.96	4.94	5.77	9.06	12.86	17.81
10	3	5.2	3.63	4.12	4.78	5.93	9.23	12.86	18.63
10	3	5.5	4.12	4.94	5.93	7.42	11.21	14.84	18.63
12	5	6	3.46	4.12	4.94	6.10	9.39	12.86	18.96
12	5	6.2	3.79	4.28	5.11	6.43	9.72	12.86	18.96
12	5	6.5	4.28	5.11	6.10	7.58	9.89	14.15	19.95
14	5	7	4.78	5.44	6.43	7.91	10.38	15.01	20.78
14	5	8	3.96	4.78	5.44	6.26	10.38	14.02	19.13
14	5	8.2	4.61	5.44	6.26	6.76	10.88	14.18	20.28
14	5	8.5	4.94	5.77	6.59	7.25	11.21	15.17	20.78
16	5	9	6.43	7.42	7.91	9.23	12.37	16.98	24.73
16	5	10	5.27	5.93	6.26	7.42	11.88	15.67	21.43
16	5	10.2	5.77	6.26	6.59	7.58	12.21	16.16	21.76
18	7	11	7.42	8.40	9.72	11.04	15.50	20.78	28.52
18	7	12	7.25	7.91	9.23	10.55	17.20	19.46	26.54
18	7	12.5	7.25	7.91	9.23	10.55	14.84	17.48	26.87
22	7	14	9.89	10.88	12.21	14.02	20.12	25.72	34.29
22	7	16	10.22	11.37	13.36	15.50	20.61	26.38	34.96
26	8	18	14.84	16.16	19.13	22.42	29.34	35.95	48.97
26	8	20	15.67	16.82	20.28	24.74	34.45	37.92	49.46
32	10	25		25.72	29.51	32.64	44.19	55.89	72.05

Prix en Euros HT

epa® LE PLUS DE VOTRE TECHNIQUE