
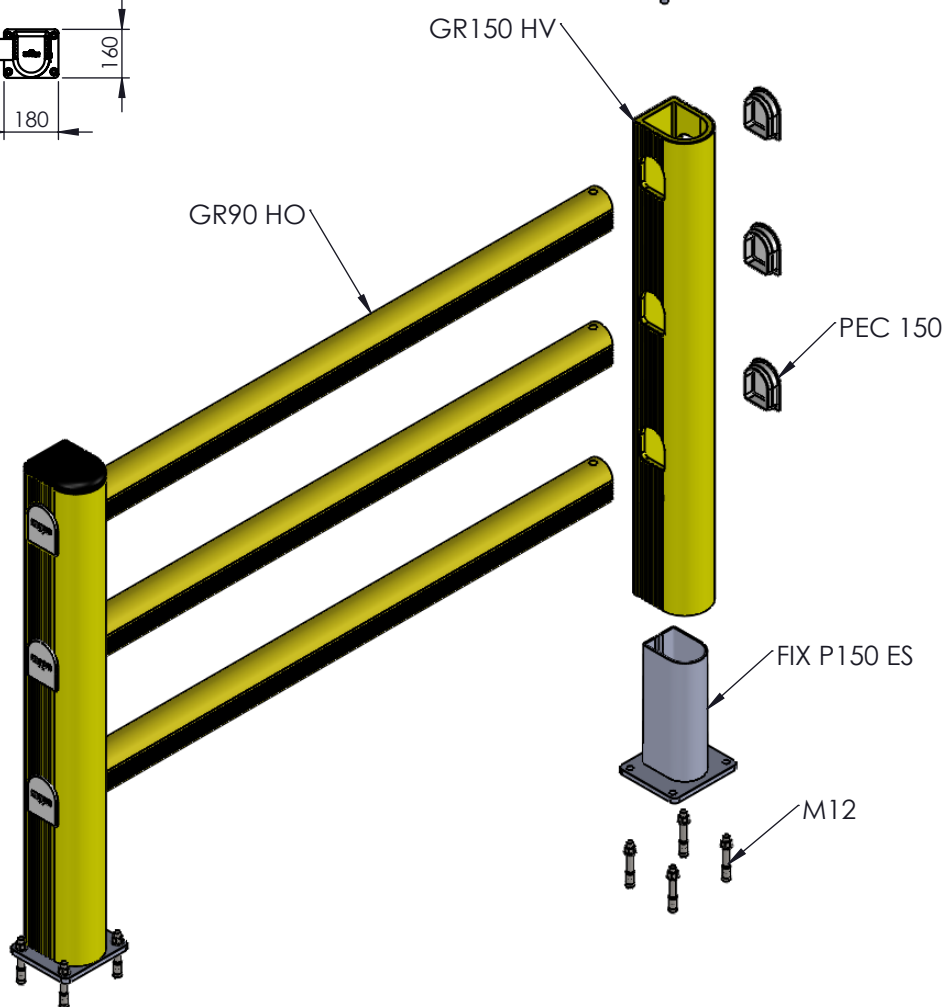
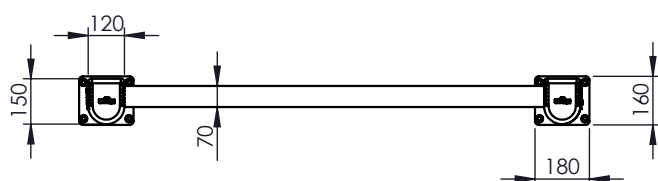


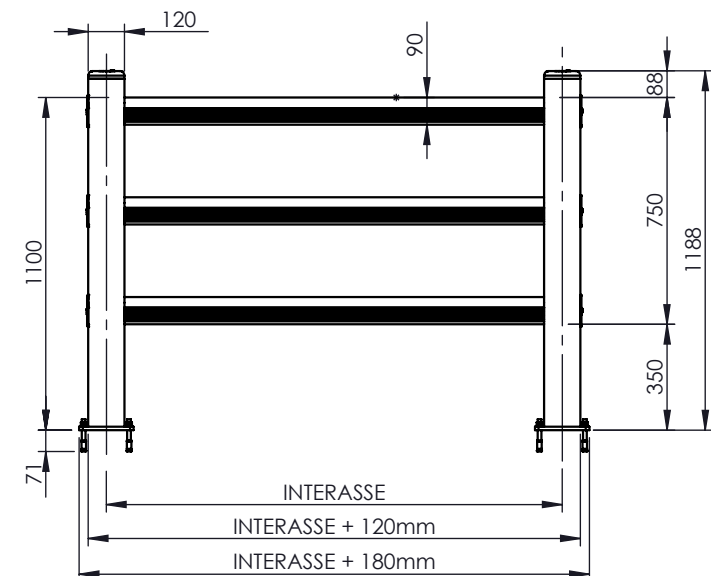

Rif. UNI EN 22768/1

Classe di tolleranza		Scostamenti limite per dimensioni lineari *							
Desig.	Denominazione.	0,5° ±3	>3 ±6	>6 ±30	>30 ±120	>120 ±400	>400 ±1000	>1000 ±2000	>2000 ±4000
f	fine	±0.05	±0.05	±0.1	±0.15	±0.2	±0.3	±0.5	
m	media	±0.1	±0.1	±0.2	±0.3	±0.5	±0.8	±1.2	±2
o c	grossolana	±0.2	±0.3	±0.5	±0.8	±1.2	±2	±3	±4
v	molto grossolana		±0.5	±1	±1.5	±2.5	±4	±6	±8

* Esclusi smussi e raccordi per eliminazione di spigoli.

* Per dims. < 0.5 mm, lo scostamento si indica dopo la dims.

IMPACT RESISTANCE: 2000 J

Rev. n°. 00 Data 06/11/15 Modifica: Prima emissione

Firma Fabio M.



Materiale

Scala 1:15

Denominazione

PEDESTRIAN 150 EXP

Q.tà

Nr. Disegno

1° Controllo

2° Controllo

Via Europa 2, Fratte (PADOVA) Italy
www.mppm.com E-mail: info@mppm.com
Tel +39.049.9301773 Fax +39.049.9300427