

FILTER + LUBRICATOR (F+L)
FILTRE + LUBRIFICATEUR (F+L)
FILTRO + LUBRIFICATORE (F+L)



TECHNICAL DATA / DONNÉES TECHNIQUES / DATI TECNICI


Fluid / Fluide / Fluido	Air / Air / Aria		
Maximum pressure / Pression Max / Pressione Max	15 bar		
Temperature / Température / Temperatura	-10 / +50° C		
Filtration grade / Grade de filtration / Grado di filtrazione	5 - 20 - 50 µm		
6 bar flow rate with Δp 1 bar / Débit à 6 bar avec Δp à 1bar / Portata a 6 bar con Δp 1bar	1 = 1350 NI/min	2 = 3200NI/min	3 = 5000NI/min
Bowl capacity / Volume du bol / Capacità tazza	1 = 22cm ³	2 = 46cm ³	3 = 89,5cm ³
Wall clamping screws / Vis pour fixation / Viti per fissaggio	1 = M4X14	2 = M5X18	3 = M6X20

STANDARD PRODUCTS / PRODUIT STANDARD / PRODOTTI STANDARD


Code Code Codice	Size Taille Taglia	Thread Filetage Filetto	Filtration Filtration Filtrazione	Flow rate Débit Portata
XO122011	1	1/4	20µm	1350NI/min
XO132011	1	3/8	20µm	1350NI/min
XO232011	2	3/8	20µm	3200NI/min
XO242011	2	1/2	20µm	3200NI/min
XO352011	3	3/4	20µm	5000NI/min
XO362011	3	1"	20µm	5000NI/min

S/M: Semi automatic Manual / Manuel semi-automatique / Semiautomatico Manuale
A: Automatic / Automatique / Automatico

ORDERING CODE / CODIFICATIONS / CHIAVE DI CODIFICA

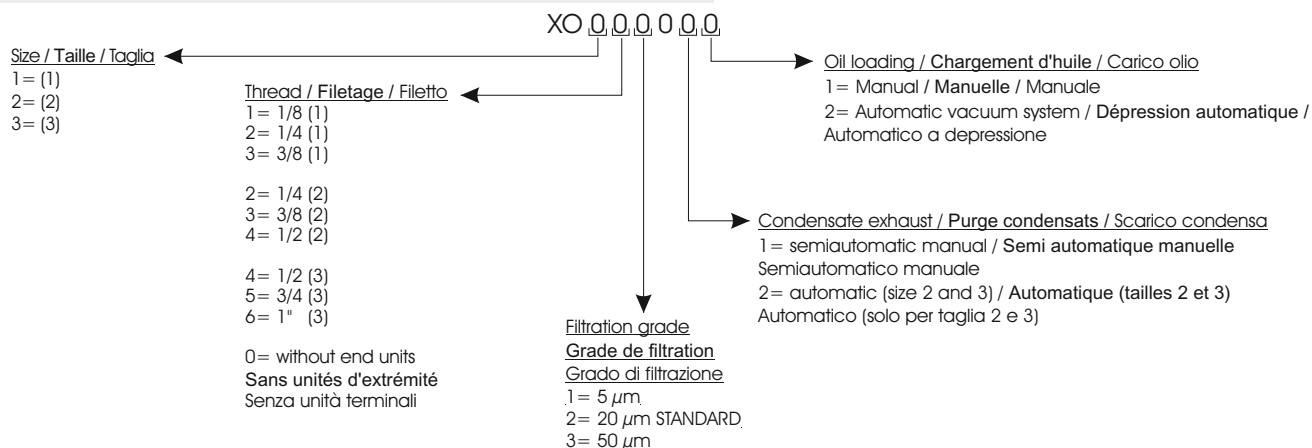

DIMENSIONS / DIMENSIONS / DIMENSIONI

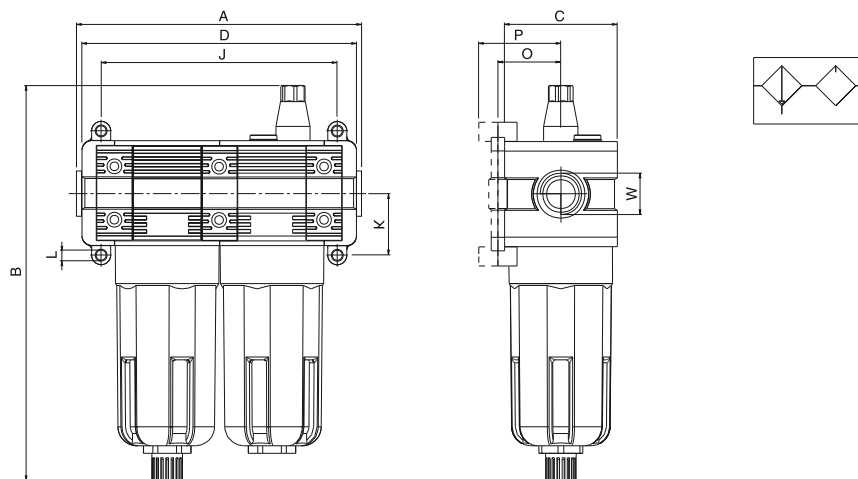

	A	B	C	D	W	J	K	L	O	P
Size 1	118,5	175	45	115	1/8 - 1/4 - 3/8	97	26	M4	26	32,5
Size 2	144	207,5	59	144	1/4 - 3/8 - 1/2	124	32,5	M5	32	38,5
Size 3	171	226,5	70	165	1/2 - 3/4 - 1	144	38	M6	38,5	45