

logiJET TM8

Ideal for:

- Mobile workplaces
- Installation on industrial trucks
- Small packing places
- Locations with high dust load

HIGHLIGHTS / FEATURES / SPECIAL ATTRIBUTES

- Compatible with: PCL5, IPDS, ZPL II, IGP, PDF and other
- Laser printer compatible
- SAP and AS/400 compatible
- Wifi optional
- Optionally available for 100 - 240 VAC, 50/60 Hz or mobile 24 V, 36 V or 48 V applications

MAXIMAL FLEXIBILITY FOR **SMOOTH** LOGISTICS PROCESSES IN **MOBILE** APPLICATIONS

logiJET TM8



Wireless Mobility in Production Environments...With battery connection (24V, 36V, 48V) and WiFi, the mobile thermal printer logiJET TM8 from Microplex can be flexibly used at any place. Optionally you can choose the model with 100 - 240V (50/60Hz) power supply. Interfaces such as USB, Centronics or the serial RS232 / RS422 extend the range of applications enormously. The robust metal housings and the optional mounting plate with vibration dampers provide optimum protection against bumps and vibrations in rough industrial environments. The logiJET TM8 prints labels, delivery notes, picklists or other working papers up to 8 inches wide in efficient and cost-effective direct thermal printing.


Print Engine

Print technology	Direct thermal (history-controlled flat head technology)
Controller	MPC 8.x
Print speed	up to 150 mm/s up to 6-inches/s
Print resolution	300 dpi x 300 dpi
Lifetime print head	up to 25.000 m
Power supply (max.)	optionally 100 - 240 VAC, max. 3,4 A, 50/60 Hz autoselectable or 24V (24,8A), 36V (16,0A), 48V (12,0A) DC
Power consumption stand-by	0,65A at 24V
Dimensions (WxDxH in mm)	390 x 280 x 165 mm
Weight	approx. 18.0 kg (without options)
Relative humidity	30 - 85 % (rel., non-condensing)
Environment temperature	5 - 40° Celsius
Interfaces	USB Ethernet-Interface 10/100 MBit, bi-directional (TCP/IP)
Options	IEEE 1284 (Centronics) RS232, RS422 WiFi: IEEE 802.11 n/g/b, WEP with 64 and 128 Bit, WPA/WPA2, WPA-PSK/WPA2-PSK
Memory	RAM: 256 MB Flash: 256 MB



Printable Media

Size	
Width	3.93" - 8.97" (100 - 228 mm) 219 mm printable
Paper thickness	0.06 - 0.25 mm

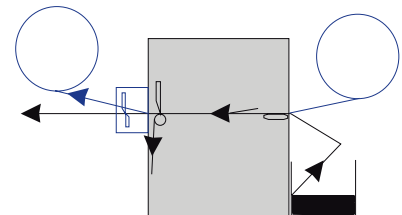

Paper path

Input	
Continuous	external e.g. fanfold, or from roll
Output	
Single Job	Tear-off Tear-off
Optional	
Continuous	External rewinder
Mounting plate	for easy mounting i.e. on fork lift trucks
Roll diameter	max. 152 mm
Cutter	in preparation
Option RFID	
Frequency Range	865.600-867.600 (ETSI EN 302 208)
RF Power	programmable in 15 levels (1dB step) from 9dBm to 23dBm (from 8mW to 200mW) conducted
Standard Protocols	EPC C1 G2 / ISO18000-6C
Features	read/write/verify (void)
Registration of antenna position	manually

MPC 8.x High-End Print-Controller

Emulations

MICROPLEX IDOL, AGFA Reno, LN03+, BULL-MP6090, IGP-10, IGP/PGL, Datamax, Etimark MP-1220, TEC Bx72, TEC B6xx, LDC, ZPL II, EPL2, Intermec Direct Protocol, IER Command, cab, Godex EZPL, Diablo 630, IBM Proprinter, Epson FX-80 (ESC/P), MT-600/MT40, IDS, ANSI Genicom, TIFF, HP Designjet, XML (SAP® RFID), CUPS Raster

Optional emulations

HP-PCL5/ HPGL, μ -Postscript, CODE-V (Magnum), XEROX XES, KODESCRIPT+, Prescribe/PSB 2, Labelpoint, Barcode 2, IPDS, AEA, AFP, RFM, Status-Out, PDF (more emulations on request)

Barcodes

EAN 8, 13, 128, add on, 2/5 3-stroke Datalogic, 2/5 3-stroke Matrix, Codabar, PDF 417, Royalbar, Planet, USD5, Aztec-Code, Jetcaps (HP/SAP), Code 39, 128 MSI, UPC A, E, Postnet, KIX, USPS One Code, UPS-Maxicode, Datamatrix, (more barcodes on request)

Additional functions

Network capabilities	authentication standard IEEE 802.1x
Intelligent barcode generation	on-the-fly in the printer
Format splitting	in several sub formats by command

Optional functions

Integrated forms management

Forms and fonts can be stored in the flash memory and can be accessed when needed.

Status-Out

Gives notice of each correctly printed page via interface. Further features can be found in the manual.

Programmable GPIO-Interface (SPS-Control)

EMBEDDED INTELLIGENCE – Enabling two-way communication between printer and a PLC. Integration of the printer into production lines is possible, controlled by GPIO-interface. Customer/Application specific modifications possible.

The brand names referred to are the registered trademarks of the respective companies. All figures and details in italics and highlighted in color are optional. Technical data is subject to change. The information contained in this specification sheet refers exclusively to the described details and not to warranted characteristics. No guarantee is assumed. The information do not exempt from the obligation for inspection of each respective individual case. Version 16.02.2021



Microplex Printware AG
Panzerstraße 5 | 26316 Varel | Germany
phone +49 4451 91 37-0 | fax +49 4451 91 37-49

