



E1020



www.chambreлан.com/E1020

Acier zingué	Extension Totale	 Français	2
Zinc plated steel	Total extension	 English	3
Stahl silbern verzinkt	Vollauszüge	 Deutsch	4
Pozinkovaná ocel	Plný výsuv	 Český	5
Acero zincado	Extension Total	 Español	6
Acciaio zincato	Estensione Totale	 Italiano	7
Verzinkt staal	Geheel uittrekbaar	 Nederlands	8
Оцинковка	Полное выдвижение	 Русский	9

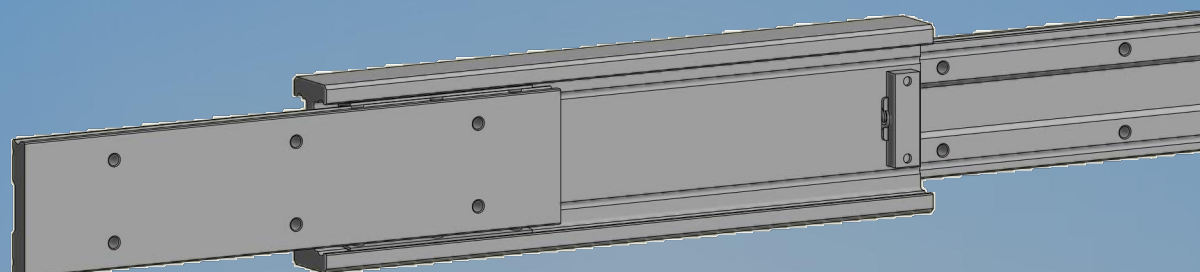

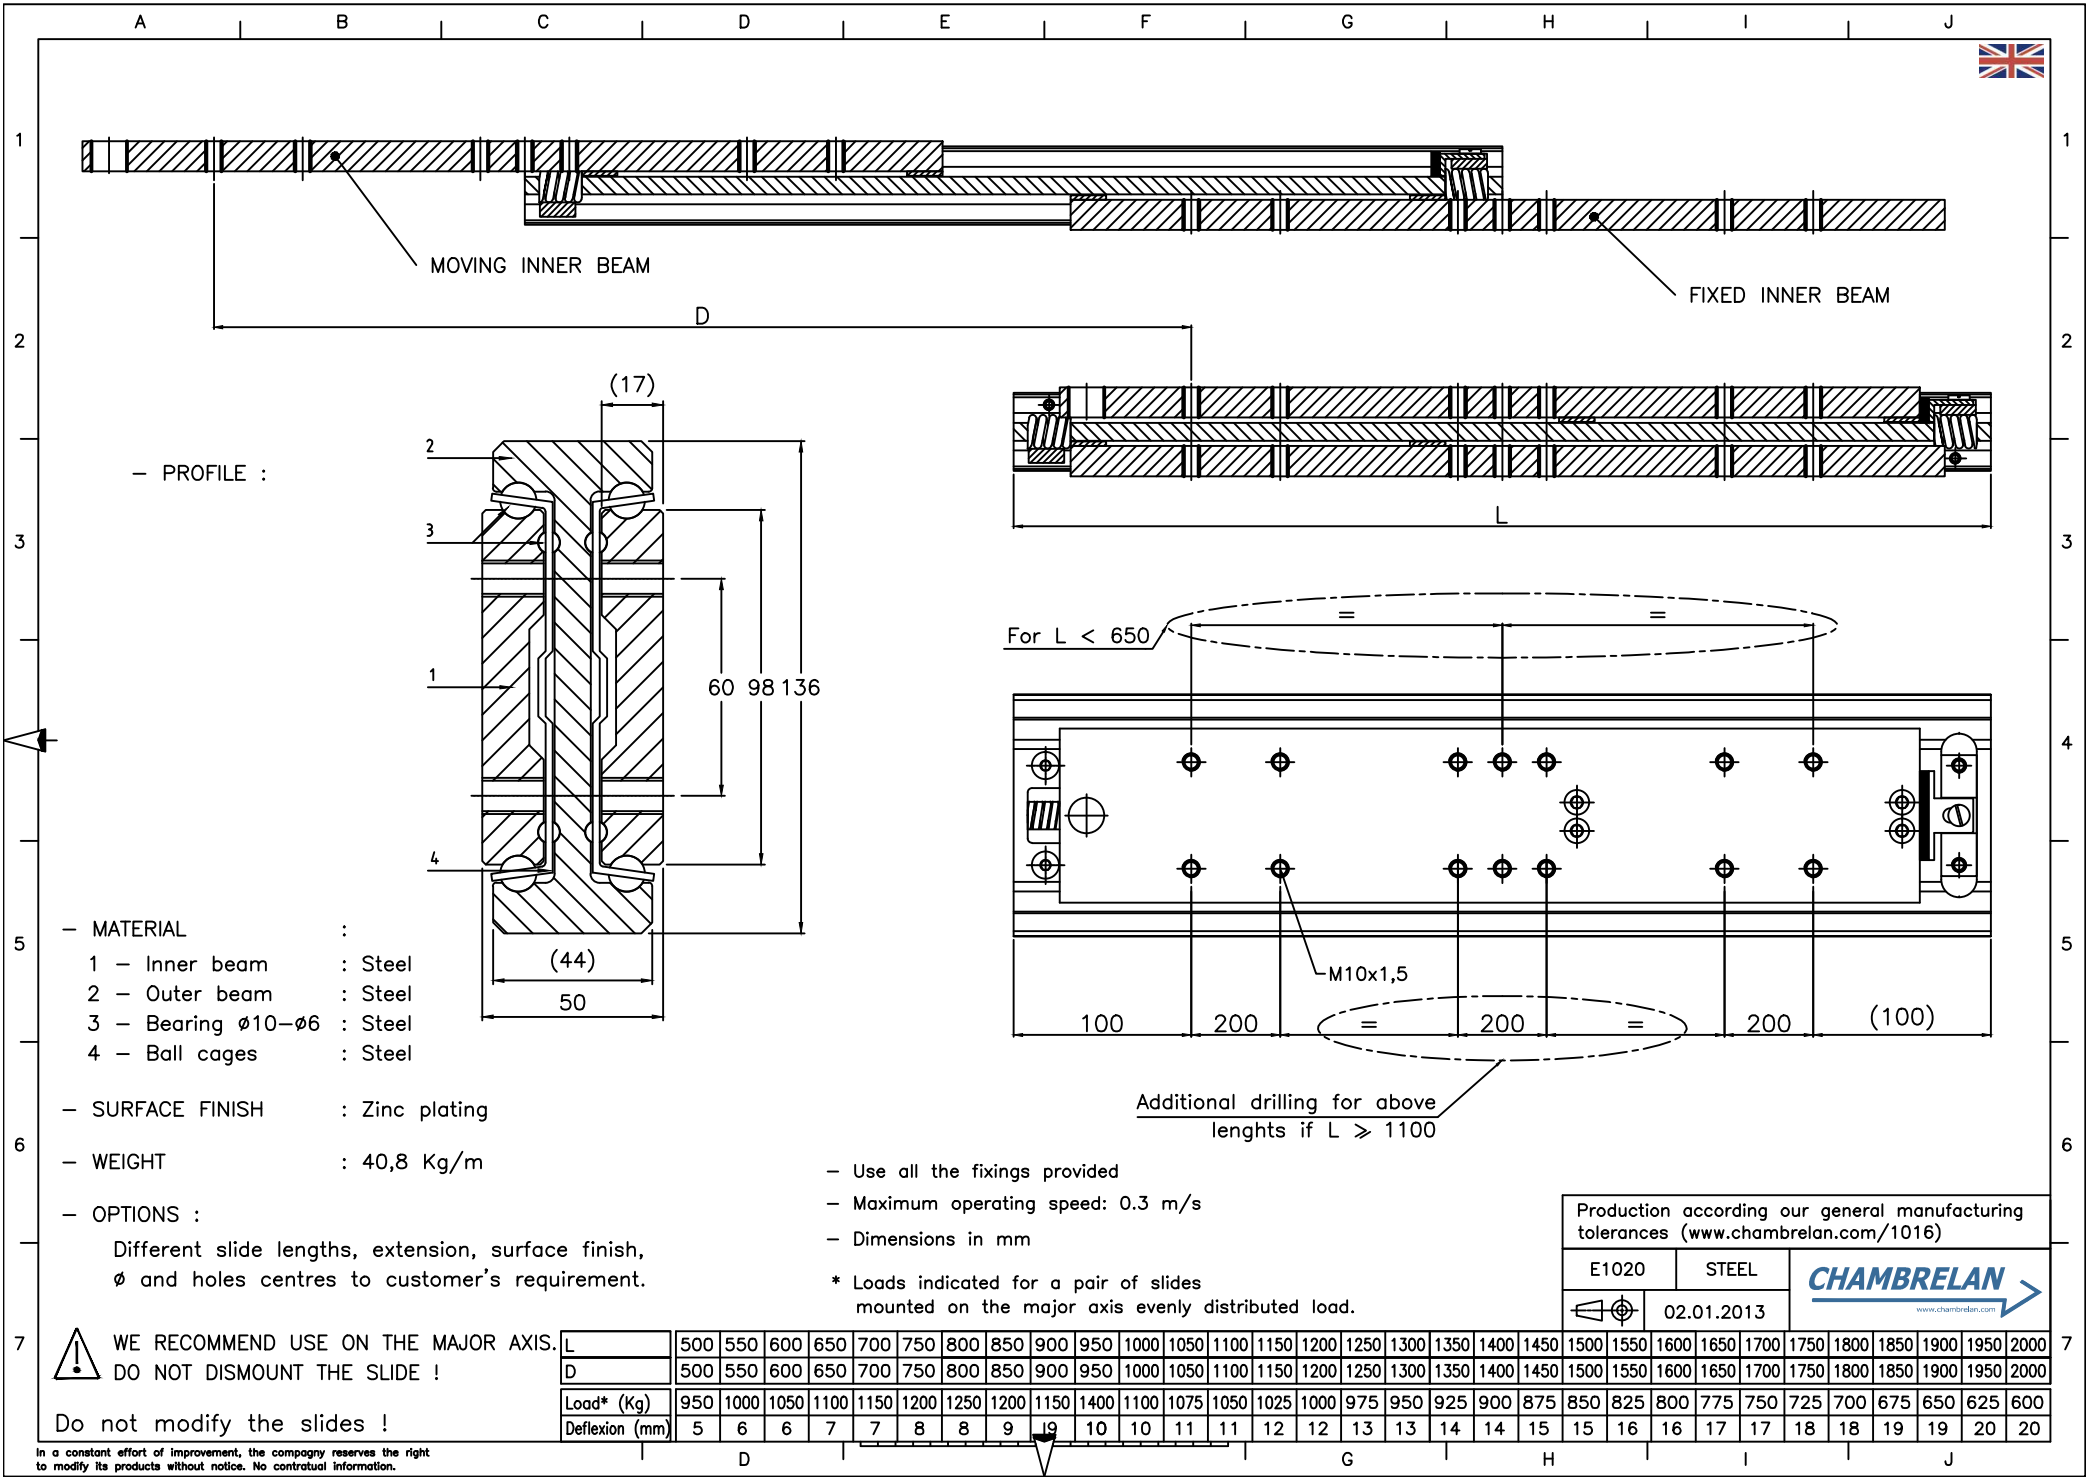

— PROFILE :

- MATERIAL :
- 1 - Inner beam : Steel
 - 2 - Outer beam : Steel
 - 3 - Bearing $\phi 10-\phi 6$: Steel
 - 4 - Ball cages : Steel

— SURFACE FINISH : Zinc plating

— WEIGHT : 40,8 Kg/m

— OPTIONS :

Different slide lengths, extension, surface finish,
 ϕ and holes centres to customer's requirement.

WE RECOMMEND USE ON THE MAJOR AXIS.
DO NOT DISMOUNT THE SLIDE !

Do not modify the slides !


- Use all the fixings provided
- Maximum operating speed: 0.3 m/s
- Dimensions in mm

* Loads indicated for a pair of slides
mounted on the major axis evenly distributed load.


Production according our general manufacturing
tolerances (www.chambrelan.com/1016)


E1020 STEEL
02.01.2013

L	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000
D	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000
Load* (Kg)	950	1000	1050	1100	1150	1200	1250	1200	1150	1100	1075	1050	1025	1000	975	950	925	900	875	850	825	800	775	750	725	700	675	650	625	600	
Deflexion (mm)	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15	16	16	17	17	18	18	19	19	20	20

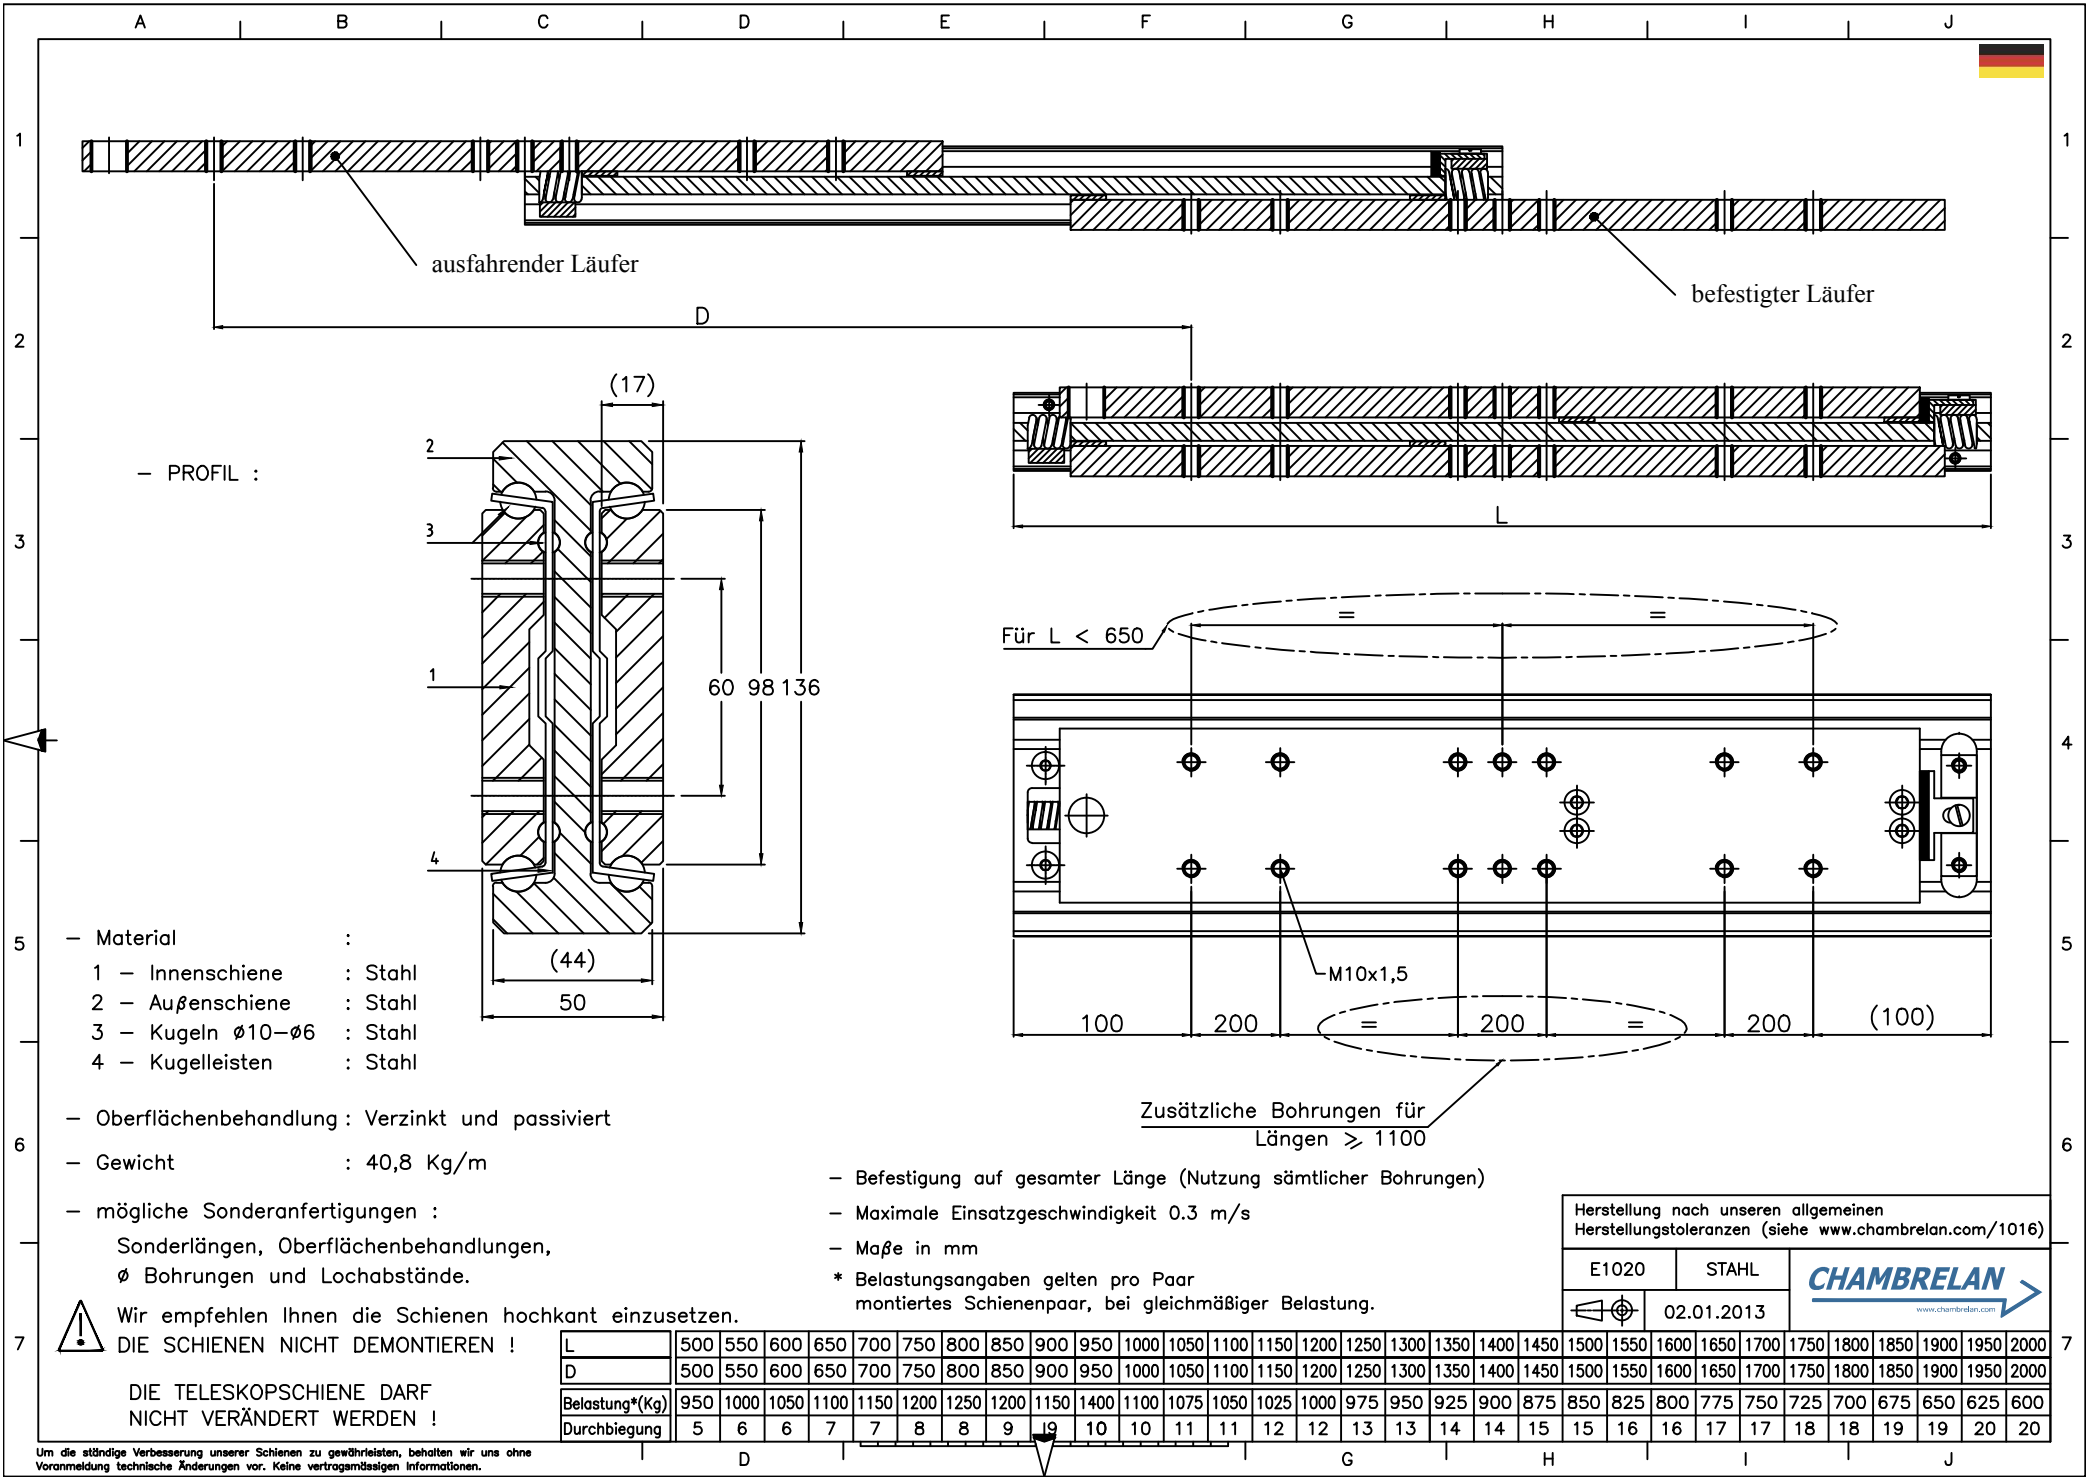

Um die ständige Verbesserung unserer Schienen zu gewährleisten, behalten wir uns ohne Voranmeldung technische Änderungen vor. Keine vertragstypischen Informationen.

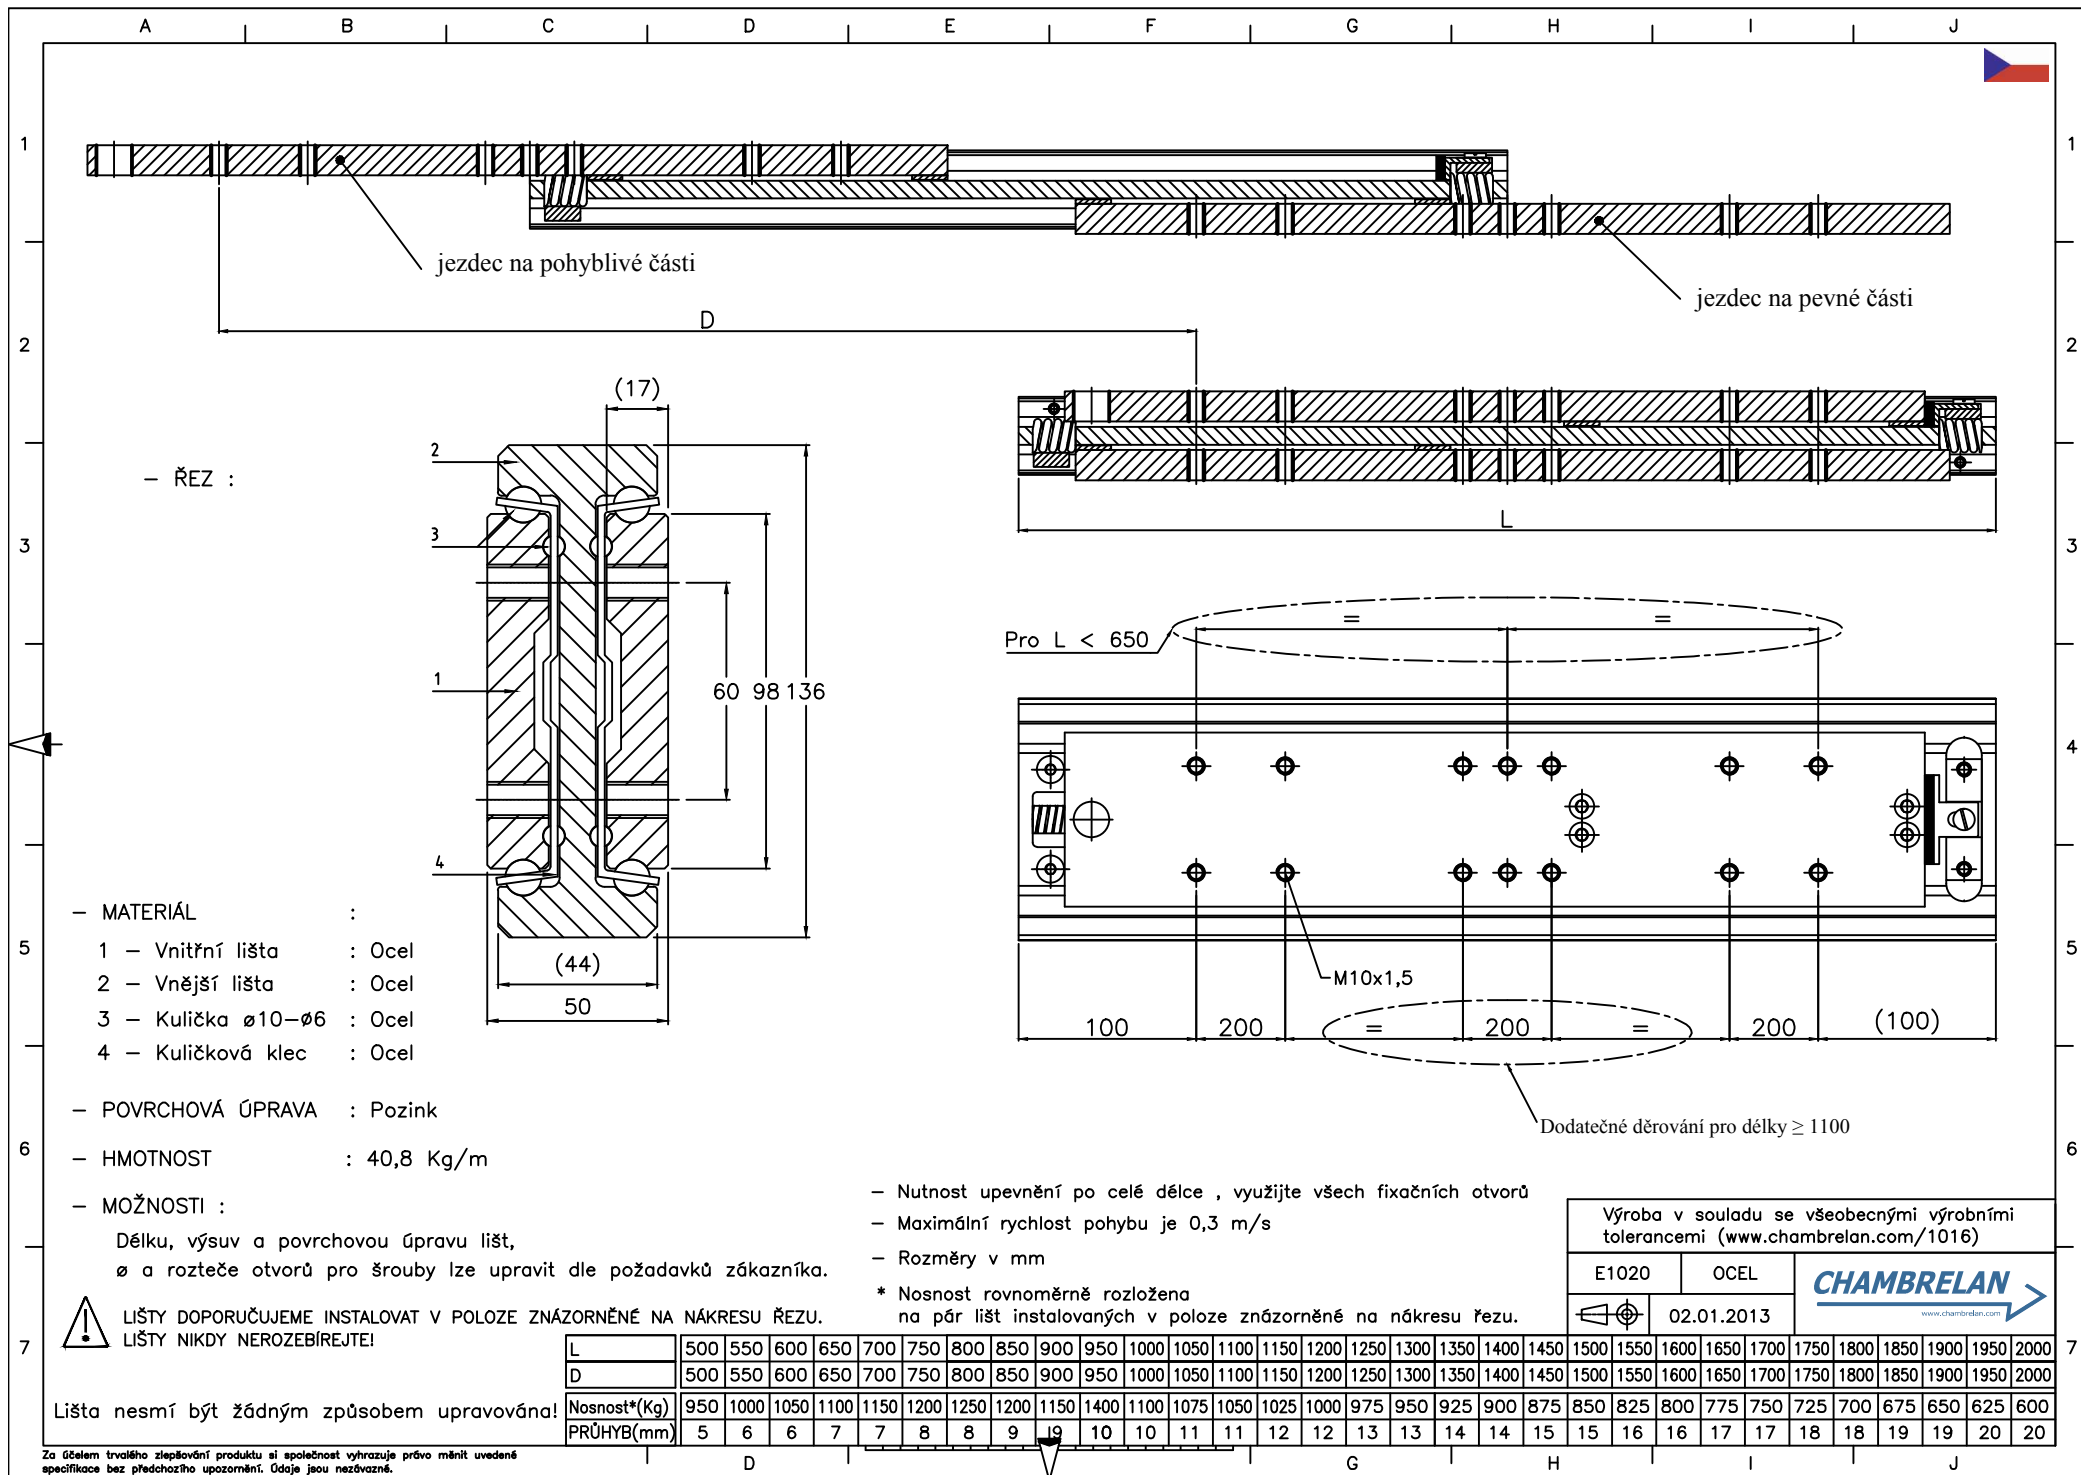

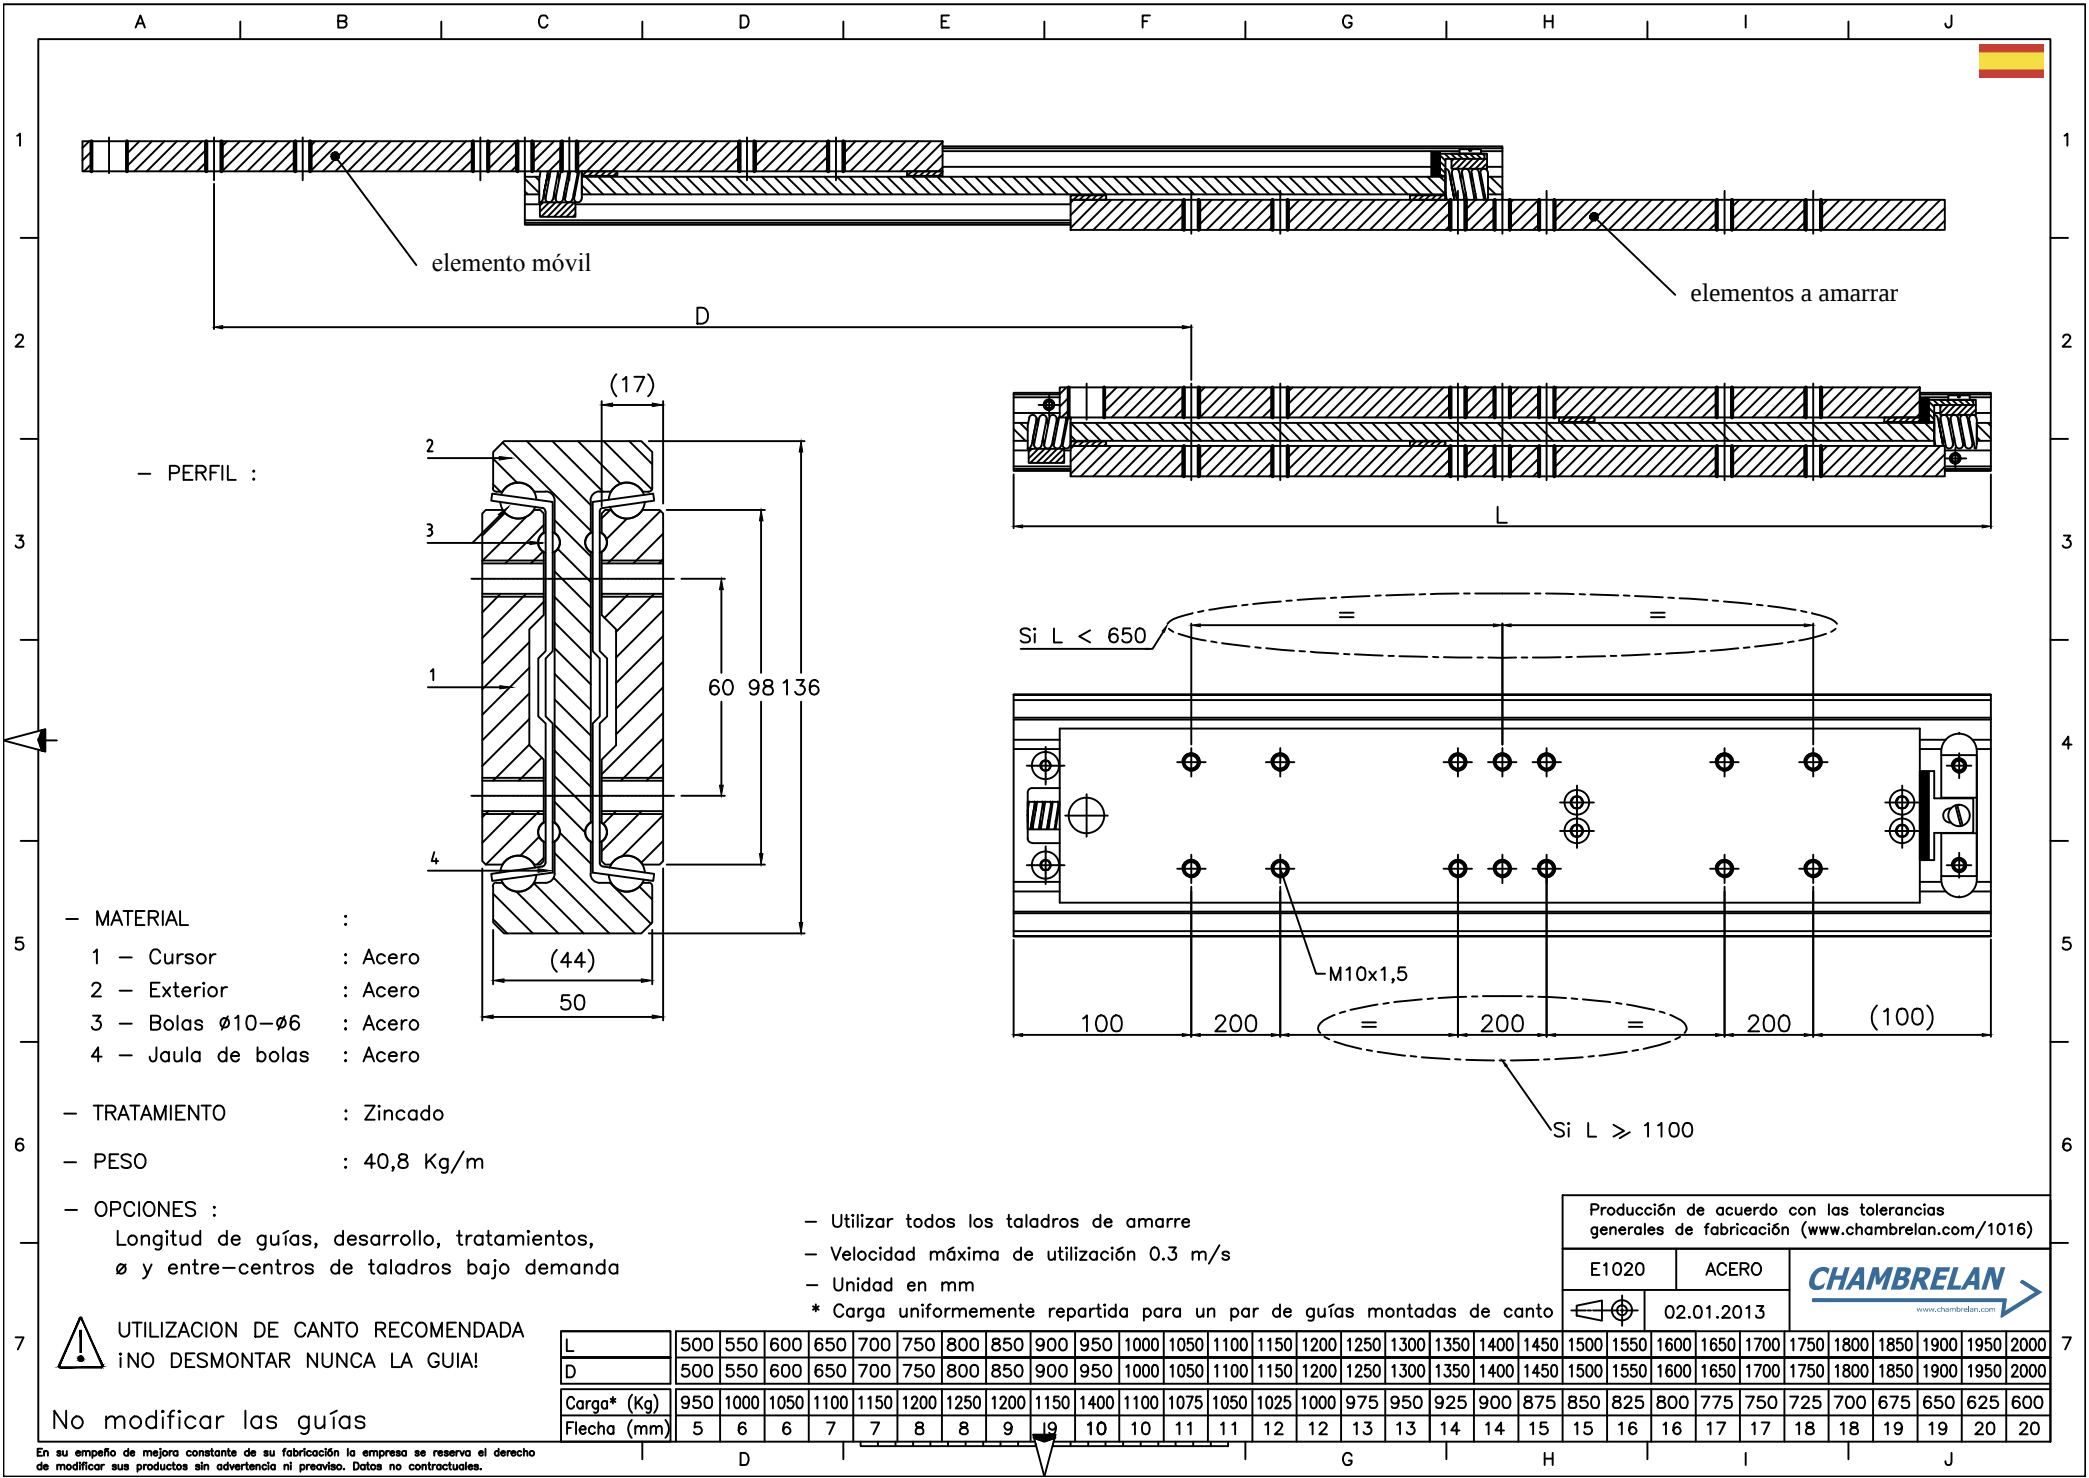

- PERFIL :

- MATERIAL :

- 1 - Cursor : Acero
- 2 - Exterior : Acero
- 3 - Bolas Ø10-Ø6 : Acero
- 4 - Jaula de bolas : Acero

- TRATAMIENTO : Zincado

- PESO : 40,8 Kg/m

- OPCIONES :

Longitud de guías, desarrollo, tratamientos,
ø y entre-centros de taladros bajo demanda

- Utilizar todos los taladros de amarre

- Velocidad máxima de utilización 0.3 m/s

- Unidad en mm

* Carga uniformemente repartida para un par de guías montadas de canto

Producción de acuerdo con las tolerancias
generales de fabricación (www.chambrelan.com/1016)

E1020 ACERO
02.01.2013
CHAMBRELAN
www.chambrelan.com

⚠ UTILIZACION DE CANTO RECOMENDADA
¡NO DESMONTAR NUNCA LA GUIA!

No modificar las guías

L	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000
D	500	550	600	650	700	750	800	850	900	950	1000	1050	1100	1150	1200	1250	1300	1350	1400	1450	1500	1550	1600	1650	1700	1750	1800	1850	1900	1950	2000
Carga* (Kg)	950	1000	1050	1100	1150	1200	1250	1200	1150	1400	1100	1075	1050	1025	1000	975	950	925	900	875	850	825	800	775	750	725	700	675	650	625	600
Flecha (mm)	5	6	6	7	7	8	8	9	9	10	10	11	11	12	12	13	13	14	14	15	15	16	16	17	17	18	18	19	19	20	20

En su empeño de mejora constante de su fabricación la empresa se reserva el derecho de modificar sus productos sin advertencia ni preaviso. Datos no contractuales.

