

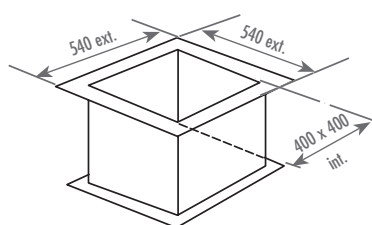
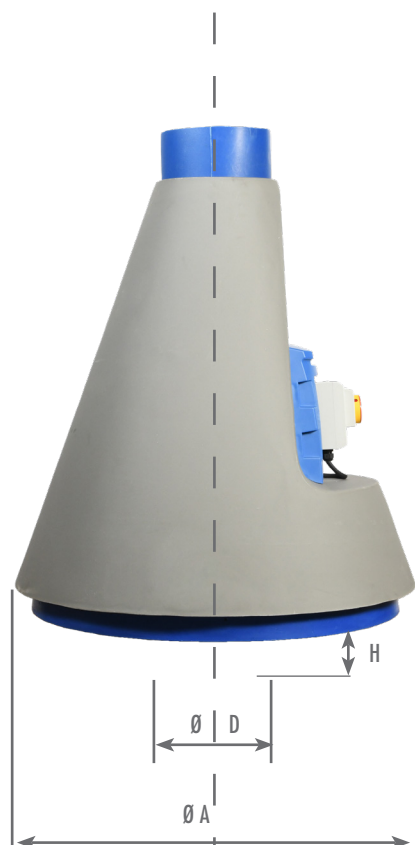


SÉRIE JET

JET 30

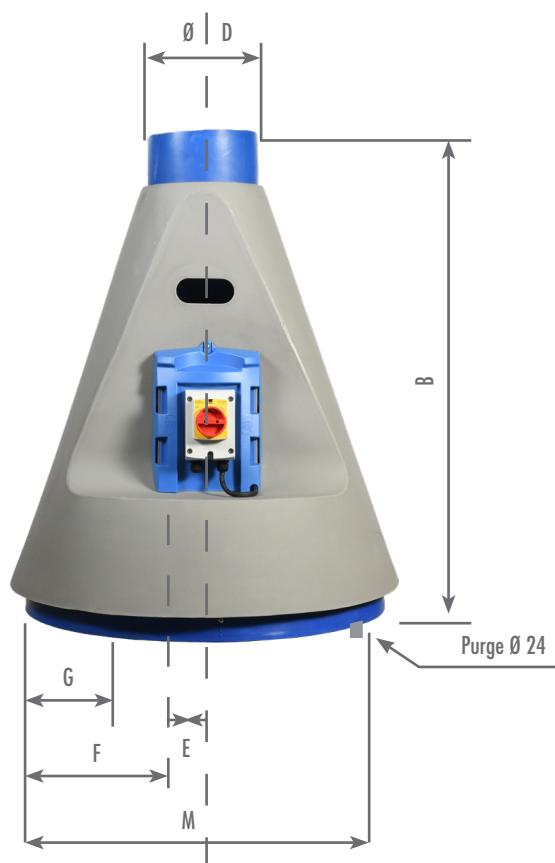

Relevé d'étanchéité non fourni

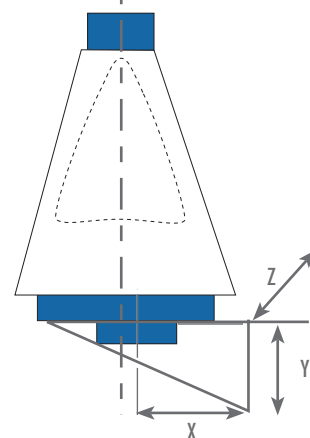

Option : Equerre - Fixation murale

Disponible en  


Dimensions (mm) - Chaise métal non fournie (voir accessoires)											
A	B	ØD	E	F	G	H	G'	X	Y	Z	M
880	1040	250	70	200	75	70	130	400	400	600	540-540 mm

NIVEAUX SONORES

dB Acoustique					Fréquence Octave (Hz)							
Vitesse (T/min)	Qv (m³/h)	Sp (Pa)	LwA dB(A)	LpA* dB(A)	63	125	250	500	1000	2000	4000	8000
930	1006	185	69	48	67	69	64	65	65	61	57	53
1450	1570	450	78	58	77	78	74	74	74	71	66	63

* Pression acoustique Lp à 3 mètres - Données acoustiques en sortie disponibles sur demande.

SÉRIE JET - JET 30

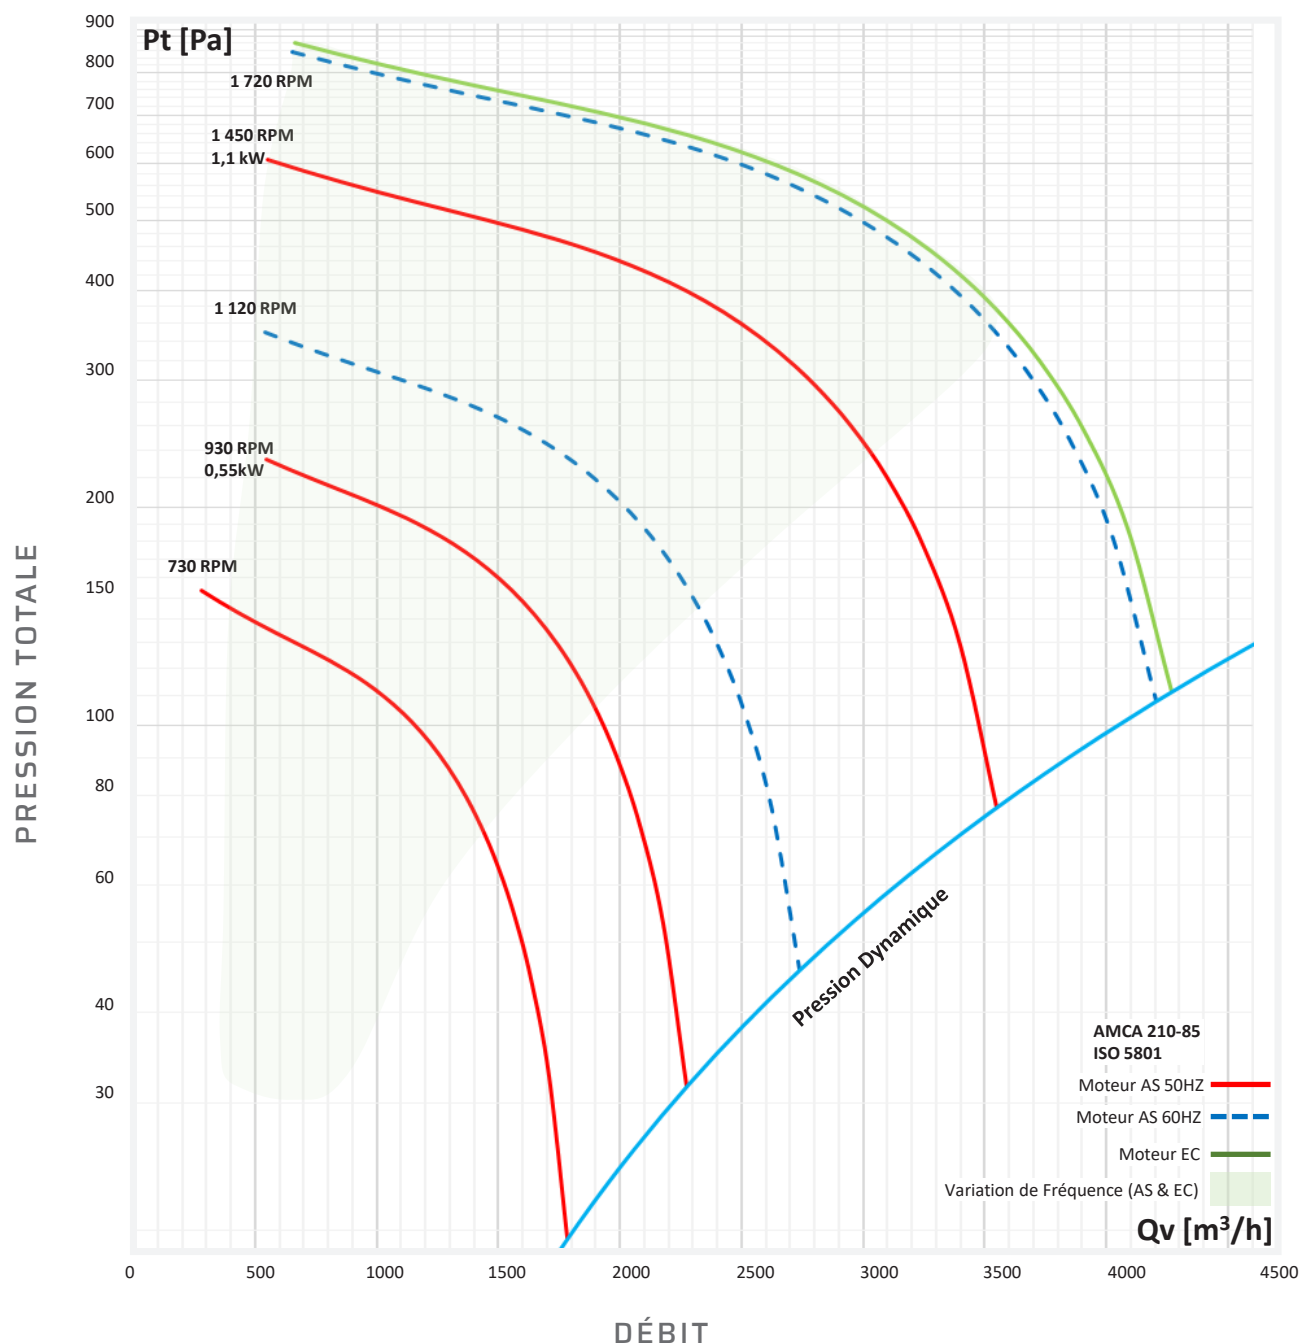

CARACTÉRISTIQUES ÉLECTRIQUES

Moteur	Puissance (kW)	Moteurs RPMs (RPM)	Voltage (V)	Intensité (A)	Poids (kg)	Référence
IP55 Asynchrone Monophasé	1,1	1450	230	7,23	23,3	71302010
IP65 EC Monophasé	1	1720	220/277	12	11,2	72302010
IP55 Asynchrone Triphasé	0,55	930	230/400	2,72/1,57	21,3	71301000
	1,1	1450	230/400	4,32/2,48	23,8	71302000
IP55 Asynchrone Triphasé ATEX 	1,1	1450	230/400	5,7/3,3	23,3	71302003

Sonde PTC obligatoire pour moteur ATEX avec variateur